



120x120x38mm

- Airflow: 97.0~115.0 CFM
- Static Pressure: 6.86~8.64 mm-H₂O
- Blade: Plastic Material UL 94V-0 P.B.T.
- Frame: Die-Casting Aluminum
- Weight: 220 g

Model No.	Bearing	Rated Voltage	Freq	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VAC	Hz	RPM	CFM	mm-H ₂ O	A	W	Hour		dB(A)
FA112038HBT	2B	115	50/60	2700/3150	97/115	6.86/8.64	0.21/0.18	17.0/15.5	50000	1/2	47.0/49.0
FA112038HBL	2B										
FA212038HBT	2B	230	50/60	2700/3150	97/115	6.86/8.64	0.12/0.12	20.5/17.0	50000	1/2	47.0/49.0
FA212038HBL	2B										

2B: 2-ball bearing S: sleeve bearing


Voltage Available

115 230

Bearing System Available

2B S

PERFORMANCE P-Q CURVE

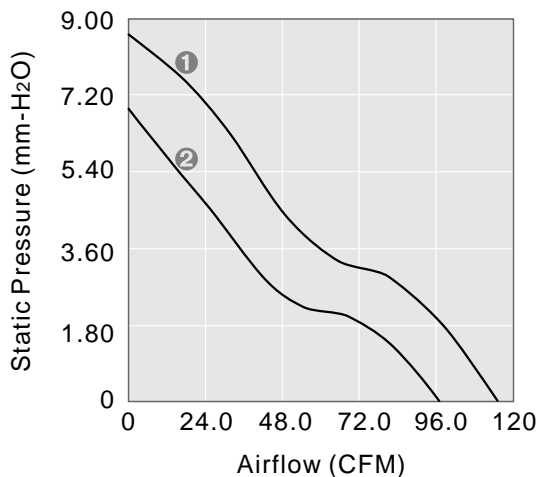

OUTLINE DIMENSIONS

